

----- CHASSIS -----

CHASSIS: KME PREDATOR XLFD W/22" RR ALUM
CAB: 4 DOOR
ENGINE: CUMMINS ISM 500 HP
TRANSMISSION: ALLISON 4000 EVS 5 SPD
FRONT AXLE: 22,500#
REAR AXLE: 48,000#

----- PUMP -----

PUMP: HALE QMAX-150 1500 GPM SINGLE STAGE
INTAKES
DRIVER SIDE: 6" & 2 1/2"
OFFICER SIDE: 6"
FRONT: 6"
REAR: 6"
DISCHARGES:
DRIVER SIDE: (3) 2 1/2" & (1) 4"
OFFICER SIDE: (1) 2 1/2" & (1) 1/2"
FRONT: (1) 1 1/2" & (1) 2 1/2"
REAR: (1) 3" & (1) 2 1/2" OFFICER SIDE
DECK GUN: (1) 3 3/4" SPEEDLAYS
OTHER: (2) 1 3/4" SPEEDLAYS
(1) 2 1/2" SPEEDLAYS

----- TANK -----

TANK: POLY
WATER: 2,500
FOAM: 50/50
EXTRA FILLS: (1) 2 1/2" FIREMANS FRIEND DS REAR
DUMPS: REAR NEWTON

----- BODY -----

BODY TYPE: 213 PLATBACK
MATERIAL: 12 GA STAINLESS STEEL
COMPARTMENTATION
DRIVER SIDE: FULL HEIGHT-SPLIT DEPTH
OFFICER SIDE: FULL HEIGHT-SPLIT DEPTH
HOSEBED:
CAPACITY: 11" DEEP
DIVIDERS: TWO (2)
HOSE LOAD: 1300' - 5"
500' - 3"
200' - 2-1/2"

----- MISC. -----

GENERATOR: ONAN 15,000 WATT MOBILE PTO/HYD
FOAM SYSTEM: HALE FOAMLOGIX 5.0


CUSTOMER APPROVAL:

NAME: _____
TITLE: _____
DATE: _____

THIS DRAWING IS A GENERAL CONFIGURATION AND MAY NOT NECESSARILY REFLECT ALL CONTRACTUAL REQUIREMENTS. CONTRACT SPECIFICATIONS SHALL PREVAIL OVER DRAWING.

SY#	DATE	REVISION DESCRIPTION	APP'D
C	6-23-10	REVISED	
B	3-17-10	REVISED PER PRECONSTRUCTION	RM
A	2-5-10	REVISED	RM

SALES ENGINEER : ROB MABRY

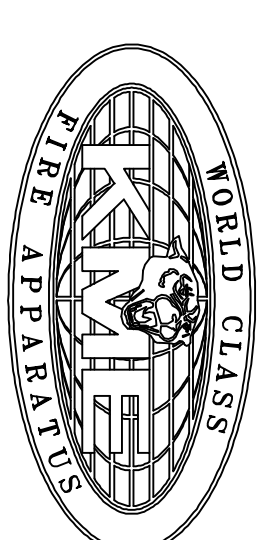

KOVATCH MOBILE EQUIPMENT
ONE INDUSTRIAL COMPLEX - NESQUEHONING, PA 18240

DIMENSIONS ARE APPROXIMATE & MAY VARY DUE TO BUILD ADJUSTMENTS

DATE: 1-18-10 SCALE: 1"=24" DWG SIZE: D DRAWN BY: JJM APPROVED BY: RM

KME CUSTOM TANKER

ALLEN VFC INC, MD

GS0#7957