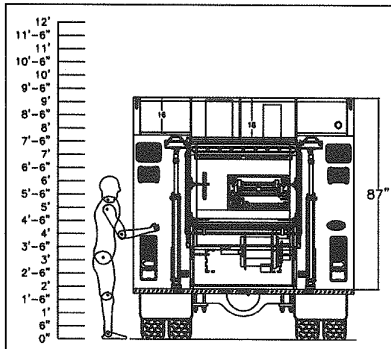

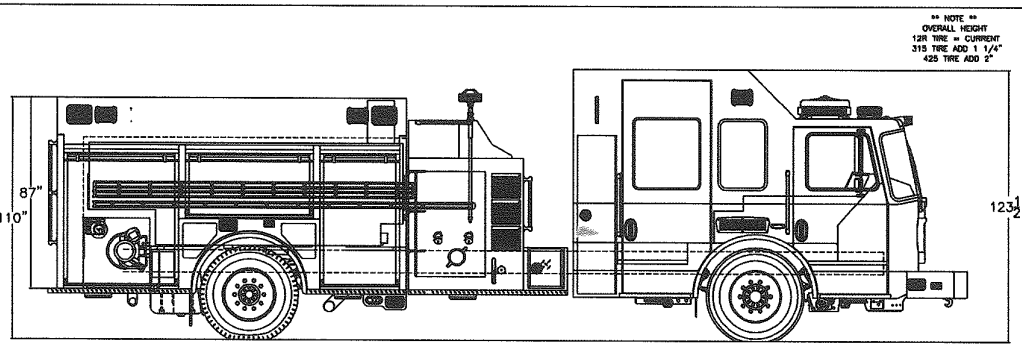



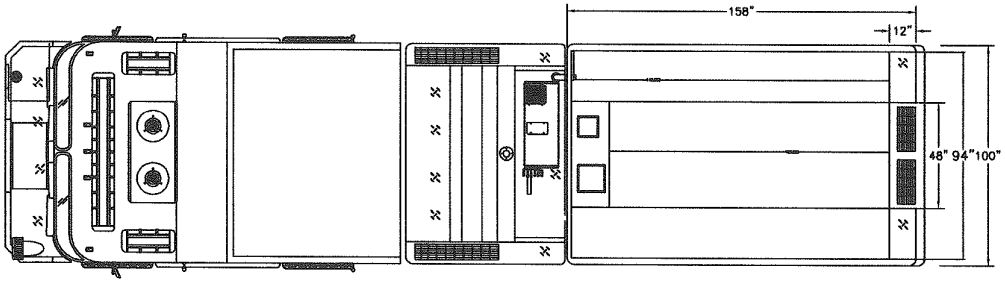



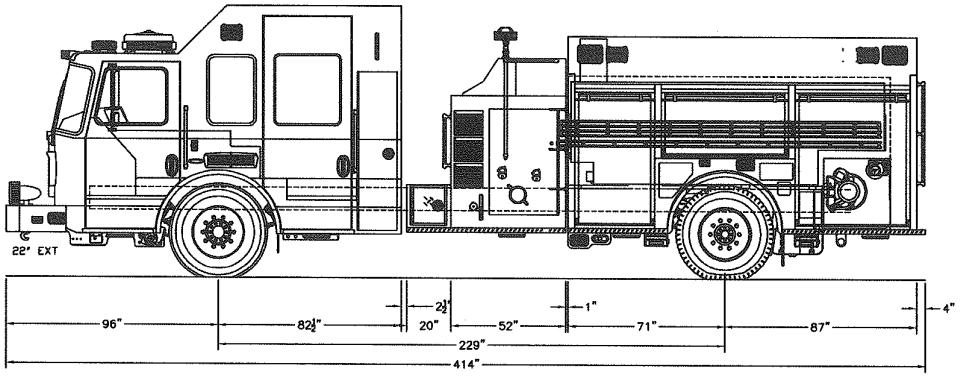

CHASSIS

CHASSIS: 100"W KME PREDATOR XLFD
CAB: 4 DOOR WITH 22" RAISED ROOF
ENGINE: CUMMINS ISL9 450 HP
TRANSMISSION: ALLISON 3000EVS
FRONT AXLE: 21,450 LB
REAR AXLE: 27,000 LB

PUMP

PUMP: HALE QMAX-200 2000 GPM SINGLE STAGE

INTAKES
DRIVER SIDE: 6" & 2-1/2"
OFFICER SIDE: 6" & 2 1/2"
FRONT: 6"
REAR: N/A

DISCHARGES
DRIVER SIDE: (2) 2-1/2"
OFFICER SIDE: (1) 3" & (1) 2-1/2"
FRONT: (1) 2 1/2"
REAR: N/A
DECK GUN: (1) 2"
OTHER: (5) 2" SPEEDLAYS
(1) 2 1/2" OS FRONT HOSE BED

TANK

TANK: POLY
WATER: 650 GALLONS
FOAM: 60
EXTRA FILLS: (2) 2 1/2" AKRON, DS & OS PUMP PANEL
DUMPS: N/A

BODY

BODY TYPE: 158" FLAT BACK
MATERIAL: 3/16" ALUMINUM

COMPARTMENTATION
DRIVER SIDE: FULL HEIGHT/FULL DEPTH
OFFICER SIDE: FULL HEIGHT/FULL DEPTH

HOSEBED
DIVIDERS: THREE (3) 80 CU FT
HOSE LOAD: 1,000' OF 5"
500' OF 3"
200' OF 2 1/2"
300' OF 2 1/2"

MISC.

GENERATOR: ONAN 10,000 WATT MOBILE PTO/HYD
FOAM SYSTEM: FEECON AP-1.5

CUSTOMER APPROVAL:

NAME:

TITLE:

DATE:

THIS DRAWING IS A GENERAL CONFIGURATION AND MAY NOT NECESSARILY REFLECT ALL CONTRACTUAL REQUIREMENTS. CONTRACT SPECIFICATIONS SHALL PREVAIL OVER DRAWING

SYM	DATE	REVISION DESCRIPTION	APP'D
A	2-7-13	PRE-CON REVISIONS	RS

SALES ENGINEER : RYAN SLANE

KME KOVATCH

KOVATCH MOBILE EQUIPMENT
ONE INDUSTRIAL COMPLEX - NESQUEHONING, PA 18240

DIMENSIONS ARE APPROXIMATE & MAY VARY DUE TO BUILD ADJUSTMENTS

DATE	SCALE	DWG SIZE	DRAWN BY
01/17/2013	1"=24"	D	J.J.M
			APPROVED BY RS

KME CUSTOM PUMPER

LATHAM FD, NY

GSO#8855