

SPECIFICATIONS

CHASSIS: FORD F750 4X2 2 DOOR
 ENGINE: CAT C7 300 HP
 TRANSMISSION: Allison 3000 EYS, 5-SPEED
 FRONT AXLE: 12,000 lbs.
 REAR AXLE: 23,000 lbs.
 RESCUE BODY: 4 COMP. W.A. ALUMINUM

COMPARTMENT SIZE

(A/E): 80"H X 39 1/4"W X 26"D / TRANSVERSE
 (B/F): 80"H X 38 1/8"W X 26"D / TRANSVERSE
 (C/G): 48"H X 57 1/2"W X TRANSVERSE
 (D/H): 80"H X 47 1/4"W X 28"D
 (I): 64"H X 44"W X 50"D

DOOR OPENING

(A/E): 64"H X 36"W
 (B/F): 64"H X 36"W
 (C/G): 32"H X 53"W
 (D/H): 64"H X 46"W
 (I): 59"H X 44"W

**PLEASE REVIEW AND RETURN
 A SIGNED COPY.**

NAME: _____
 TITLE: _____
 DATE: _____


CUSTOMER PAINT CODES:

LOWER CAB AND BODY: _____

CAB TWO TONE (IF APPLICABLE): _____

**THIS DRAWING IS A GENERAL CONFIGURATION AND MAY NOT
 NECESSARILY REFLECT ALL CONTRACTUAL REQUIREMENTS**

HARRISON #20.0MPC 20,000 WATT HYD DRIVEN PTO

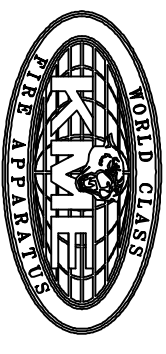

KOVATCH MOBILE EQUIPMENT
 ONE INDUSTRIAL COMPLEX
 NESQUEHONING, PA 15240

TOLERANCE UNLESS OTHERWISE SPECIFIED
 DECIMALS ± .040 THREE PLACE ±.010 REMOVE ALL DIMS
 TWO PLACE ± .030 ANGLES ±.2°
 FRACTIONS ±1/8"
 AND SHARP EDGES

DATE SCALE DRAWN BY APPROVED BY

2-11-08 NONE JIM

KME COMMERCIAL RESCUE

DEMO

GSO#7214

